
PORTABLE STEEL HOPPER WITH POWER TRACTION DRIVE - HOP-PTD

APPROX WEIGHT: 587.81 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

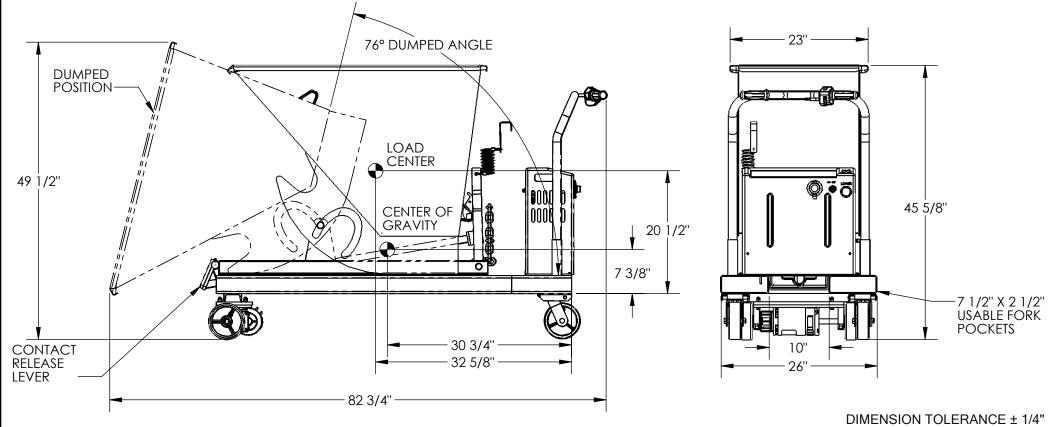

STANDARD FEATURES

MODEL NUMBER IS HOP-PTD

VOLUME: 1/3 CU.YDS. CAPACITY: 1,500 LBS. OVERALL WIDTH: 26" OVERALL LENGTH: 67 3/4"

OVERALL HEIGHT: 45 5/8" PULL CABLE IS AT LEAST: 48"

12 V DC POWERED, THROTTLE GRIP STYLE TRACTION DRIVE SYSTEM WITH BATTERY CHARGER

TURNING RADIUS: 240° MAXIMUM SPEED: 3 MPH

SPECIAL FEATURES

NONE

NEVER EXCEED LOAD CENTER RATING PER FORK TRUCK MANUFACTURER'S GUIDELINES.
DO NOT USE THIS FORK TRUCK ATTACHMENT IF LOAD WILL EXCEED FORK TRUCK MANUFACTURER'S LOAD CENTER RATING.

	, -		EE THAT THE PRODUC ESIGN AND DIMENSI	-
Α			KNOWLEDGE MY DU	
P	CC	DNFIRM PRODUCT	AND INSTALLATION	
P			PPLICABLE FEDERAL, S ONS AND STANDARD	
R			RE NON-RETURI	
0	ANT WOL		AND NON-KETOKI	IADLL
V		[] As drawn	_	
A	Signed:		Date:	
ᅵ┖ᅦ	Printed Nam	e:		

			LEAD TIME WILL START UP	ON RECEIP	PT OF SIGNED /	APPROVAL DRAWING
FOR INTERNAL USE ONLY PROJECT SIGN OFF		RNAL USE ONLY CT SIGN OFF	VESTIL MANUFACTURING		P.O.# X W.O.#	
	SALES				X	
	ENG.			BAIE. 8/2	26/2016	SALES: X
	FAB.		reference: X		SCALE: 1:16	
	POWER		QUOTED LEAD TIME: χ	QUOTE #		37-007-086